


Anhang: Durchschwenkmaße



Für die entsprechenden Maße der Sattelzugmaschinen siehe zugehörige Zeichnungen

A 001	R = 1388	a = 2280
A 003	R = 1840	a = 2014
A 004	R = 1638	a = 2194
A 005	R = 1642	a = 2174
A 007	R = 700	a = 2040
A 009	R = 1275	a = 2350
A 017	R = 668	a = 2087
A 018	R = 1319	a = 1900
A 020	R = 1275	a = 2350
A 023	R = 1295	a = 2343
A 024	R = 1769	a = 2056
A 027	R = 2046	a = 2385
A 028	R = 1283	a = 2330
A 030	R = 1458	a = 2290
A 033	R = 1286	a = 2195
A 035	R = 1777	a = -
A 036	R = 1450	a = 2385
A 037	R = 1786	a = 2720
A 038	R = 1586	a = 2320
A 039	R = 1243	a = 2000
A 040	R = 1221	a = 2150
A 043	R = 1294	a = 2400
A 045	R = 1595	a = 2209
A 046	R = 1713	a = 2500
A 047	R = 1632	a = 2424
A 048	R = 1330	a = 2600
A 049	R = 1286	a = 2580
A 053	R = 1225	a = 2483
A 054	R = 1476	a = -
A 058	R = 1263	a = 2497
A 060	R = 1378	a = 2220
A 065	R = 1254	a = 2532
A 066	R = 1733	a = 2320
A 067	R = 1831	a = -
A 069	R = 1420	a = 2795
A 070	R = 1330	a = 2760
A 071	R = 1259	a = 2520
A 073	R = 2034	a = 2109
A 079	R = 1294	a = 2400
A 081	R = 1433	a = 2390
A 082	R = 1553	a = 2820
A 085	R = 1775	a = 2610
A 089	R = 1278	a = 2700

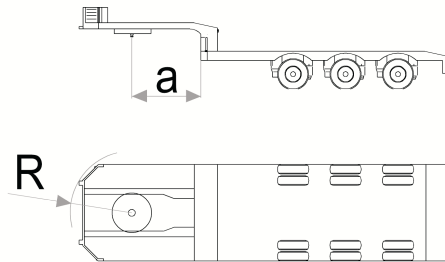